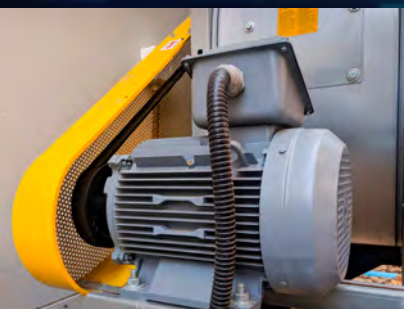




INDUSTRIAL & AGRICULTURAL BELTS



CLASSICAL V-BELTS

 MITSUBA®	Cross Section	Top Width (mm)	Height (mm)
	M	10.0	5.5
	FM	10.8	8.0
	A	12.5	9.0
	B	16.5	11.0
	C	22.0	14.0
	D	31.5	19.0
	E	38.0	24.0
	HL	45.0	22.0
	HM	50.0	19.0

Angle 40°

WEDGE V-BELTS

Cross Section	Top Width (mm)	Height (mm)	 MITSUBA®
SPZ / 3V	9.7	8.0	
SPA	12.7	10.0	
SPB / 5V	16.5	13.0	
SPC	22.0	18.0	
8V	25.0	23.0	



Angle 38°

DOUBLE V-BELTS

Cross Section	Top Width (mm)	Height (mm)	 MITSUBA®
AA	13.0	10.0	
BB	16.5	13.0	
CC	22.0	18.0	

Angle 40°



NARROW RAW EDGE

Cross Section	Top Width (mm)	Height (mm)	 MITSUBA®
SPZX / 3VX	9.7	8.0	
SPAX	13.0	8.8	
SPBX / 5VX	16.3	13.0	
SPCX	22.0	18.0	
Angle 38°			


AG BELTS

Cross Section	Top Width (mm)	Height (mm)	 MITSUBA®
SB	16.5	10.0	
SC	22.0	11.0	
SBX	16.8	10.0	
SCX	22.0	11.0	
Angle 40°			

BANDED COG BELTS

 MITSUBA®	Cross Section	Top Width (mm)	Height (mm)
	R3VX	10.3	9.7
	RAX	13.0	10.4
	RBX	17.0	12.7
Angle 38°			

BANDED BELTS

 MITSUBA®	Cross Section	Top Width (mm)	Height (mm)
	RSPZ / 3V	9.7	10.0
	RB / HB	17.0	13.0

SECTION	BELTS SIZE	MOQ/PCS.
M,Z	18"-70"	100
FM,9,5	21"-60"	100
A, 12.5, 13	18"-80"	50
	81"+	30
B,17	18"-80"	50
	81"+	25
C,22	34"-120"	20
	121"+	20
D,32	88"-490"	12
E	100"-487"	10
AA	75"-240"	17
BB	75"-240"	26
CC	80"-240"	18
SPZ,3V	1000-6350 mm.	70
SPA	1000-2119 mm.	30
	2120-12360 mm.	24
SPB,5V	1150-12390 mm.	50
SPC	1780-12400 mm.	18
8V	86"-490"	16
HB,RB	76"-487"	24 Ribs/ 32 Ribs/Mold
HC,RC	90"-489"	20 Ribs/ 24 Ribs/Mold
RSPC	1780-12400 mm.	20
R8V	90"-489"	16
RE_MF1xxx(9.5,10,FMX)	533-2540 mm.	85
RE_MF6xxx(12.5,13,AX)	533-2540 mm.	68
RE_MF8xxx(17,BX)	533-2540 mm.	50
RE_MF9xxx(22,CX)	533-2540 mm.	39
PK	3PK	85
	4PK	64
	5PK	50
	6PK	42
	7PK	36
	8PK	32
PL	45"-92"	15 Sleeves
ALL SIZES	1145-2330 mm.	
PJ	64 RIB	24 Sleeves
ALL SIZES	60 RIB	18 Sleeves
	200 RIB	6 Sleeves
SCOOTER BELT	Full Range	2 Sleeves
ALL SIZES		
TIMING BELTS	Full Range	50
ALL SIZES		