



MITSUBA®

Power Transmission Belt




EPDM SERIES

RAW EDGE COG BELT

- +Temperature Range: -30~120°C
- +Superior Crack resistant
- +Weight Reduction
- +High Stiffness
- +Antistatic Heat Resistant
- +Compliant to RoHS and REACH
- +Reducing downtime



Construction Materials

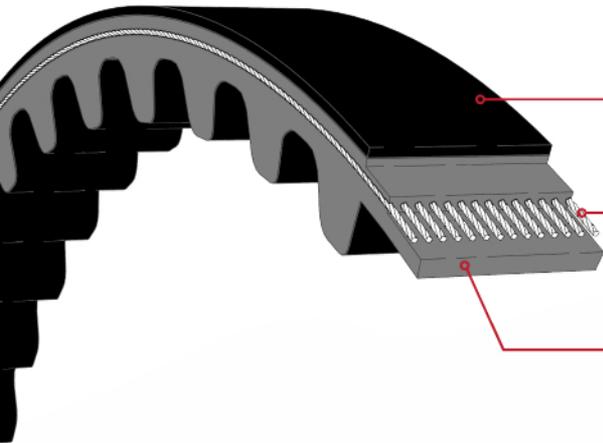


Top Fabric Cotton

Cord: Polyester with Special Treatment

+Superior Tension Stability

Rubber: High modulus EPDM

CROSS SECTION

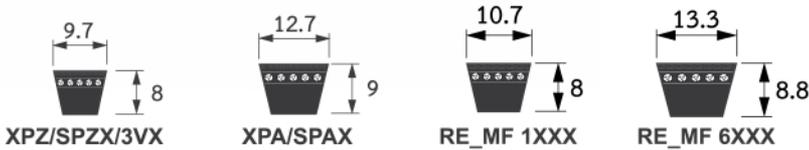

+Power Rating is 30% higher than standard cogged type
+Energy Efficient

INSTALLATION

